

## FASET Bulletin No 15 (Revision 2)

# Incorrect Safety Net Support Clamps – Single Gravlock

The practice of using single scaffold girder clamp - coupler or part of them to attach or hook a Safety Net to the bottom flange of a beam or similar structure is prohibited. Safety Nets must not be installed as shown in Figure 1.



Figure 1. Incorrect attachment of a Safety Net

Scaffold girder clamps are designed to be used in pairs with a scaffold butt / tube attached between the two clamps, as shown in Figure 2 and Figure 3.



Figure 2. Correct use of a scaffold girder clamp



Figure 2. Correct use of a scaffold girder clamp

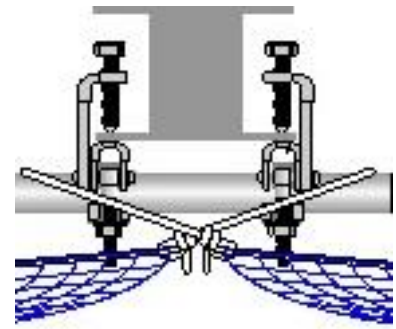


Figure 4. Correct use of a scaffold girder clamp

The clamps must be attached to both sides of the steel work and the Safety Net attached to the scaffold butt / tube as illustrated in Figure 4.

For more information about FASET, contact:

FASET  
PO BOX 138, WHITCHURCH  
SHROPSHIRE. SY13 9AD

T +44 (0)1948 780652  
E [enquiries@faset.org.uk](mailto:enquiries@faset.org.uk)  
W [www.faset.org.uk](http://www.faset.org.uk)

**FASET**  
Fall Arrest Safety Equipment Training